

# PoleStar Smart

Refrigeration dryers

High Efficiency & Energy Saving



PoleStar Smart refrigeration dryers have been designed for the efficient removal of water from compressed air.

Equipped with the patented SmartSave energy-saving feature PoleStar Smart continually and precisely modulates its mode of operation to meet prevailing operating conditions, resulting in accurate dew-point monitoring with corresponding aligned power consumption.

Furthermore, indirect cost savings, reducing the “hidden costs” of pressure drop are maximised by the use of a patented “all-in-one” aluminium heat-exchanger-SmartPack. Here the provision of large open channels and no-interconnecting pipe-work enables the free, un-interrupted passage of air through the dryer, resulting in pressure drops second to none.



## Contact Information:

Parker Hiross S.p.A.  
Strada Zona Industriale 4  
S. Angelo di Piove PD  
Italy

**Tel: +39 049 9712 217**  
**Fax: +39 049 9701 911**  
**Email: info@parker.com**

[www.dh-hiross.com](http://www.dh-hiross.com)


## Product Features:

- Suitable for all compressed air applications
- Suitable for all compressor types, including variable flow
- The most energy efficient compressed air fridge dryer
- Low pressure drops for lower operational costs
- Cost of ownership reduced
- Significantly contributes to the indirect reduction of CO<sub>2</sub> into the environment

## Philosophy

Parker Hiross specialises in cooling, purification, and separation technologies, where compressed air and gas purity, product quality, technological excellence and global support are paramount. We design and manufacture compressed air treatment products and cooling equipment for many key industries where ease of integration, low cost of ownership and energy saving can make the difference.


Parker Hiross has been supplying industry with high efficiency products with low lifetime costs and reduced CO<sub>2</sub> emissions since 1964. Our philosophy ‘to stand out from the crowd’ is our credo, encouraging our employees to achieve continuous improvement and satisfy customer expectations.

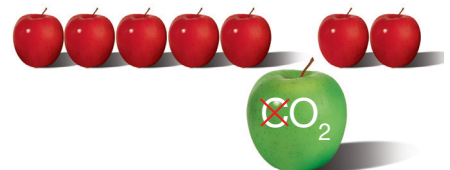

ENGINEERING YOUR SUCCESS.



# PoleStar Smart

The **SmartPack** exchanger (patent-pending) is an extremely robust, all-in-one aluminium module with no connecting pipe-work. It offers one of the lowest pressure drop performances in it's class and in terms of energy saving acts as an internal "thermal-mass cold-store," utilising un-used refrigeration energy during periods of variable load.

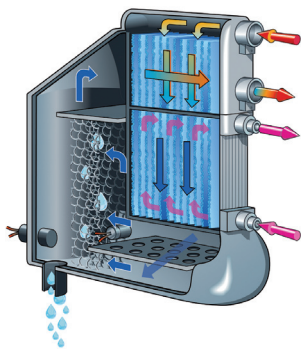

PoleStar Smart® features exclusively **compliant scroll compressors** (from PST120 upwards), offering energy savings of up to 20% compared to other systems.

Resistant to liquid refrigerant returns and with 50% less moving parts than similar technologies, these compressors are extremely reliable and very robust. Low vibration levels also serve to prolong the refrigeration circuit life.

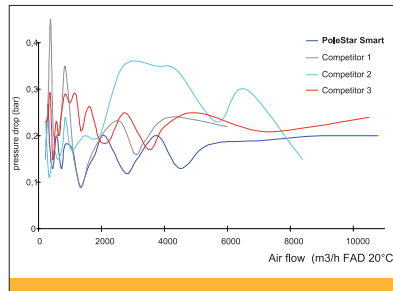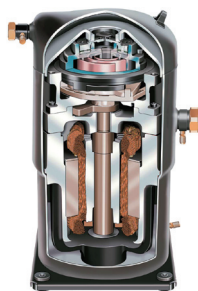

Maximum dew point performance is assured by:

- large air channels leading to low air flow velocity
- an oversized demister separator offering optimum condensate separation even at partial air flows



An additional standard feature on models from PST120 upwards is **SmartControl**.

This multi-functional display provides accurate digital dewpoint reading and visual indication of the coded alarm monitoring of the dryer.

**SmartControl additionally** manages the **SmartSave** feature (patent pending), informing the user when the dryer is operating in energy saving mode. A display indicates the average percentage savings on energy being achieved. Maintenance intervals are periodically displayed whilst the provision of a status report (indicating the last eight events) and hours-run meter simplify service.

Standard voltage-free contacts, MODBUS compatible supervisor (no gateway required) and an optional RS485 serial card connection allow remote monitoring of the dryer.


## Low Pressure Drops

Every 140mbar of pressure drop adds approx. 1% to the cost of electrical power required by the compressor

- a dew point sensor positioned in the air flow to ensure optimum control.
- Thermal Shield Insulation (TSI) - contributing to very low overall power consumption.

An integral zero-air loss drain **SmartDrainer** is fitted as standard to PST120 and upwards.

A large capacity condensate drainage chamber is an integral part of the heat exchanger. The zero-air-loss drain is synchronised to open automatically on sensing the level of condensate present in the drainage chamber. This valve closes again before any compressed air can escape. In the unlikely event of a fault during drain operation, self-diagnostic troubleshooting software signals an alarm and the drain continues to function thereafter in timed mode, returning to zero-air-loss operation when the fault has been rectified.

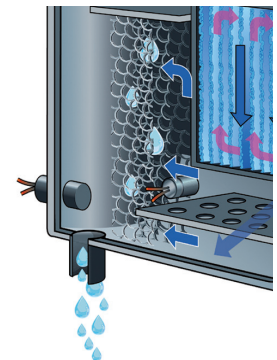

# Technical data


Model	technical data				dimensions (mm)			weight (kg)	Pre filter	Post filter
	air flow		abs. power	air	width	height	depth			
	m <sup>3</sup> /h	m <sup>3</sup> /min	kW	conec.	A	B	C			
PST075	450	7,5	0,9	1 ½"	703	945	562	83	HFN122Q	HFN122P
PST095	570	9,5	1,38	1 ½"	703	945	562	83	HFN122Q	HFN122P
PST120	720	12	1,13	2"	706	1.064	1.046	145	HFN122Q	HFN122P
PST140	840	14	1,14	2"	706	1.064	1.046	145	HFN175Q	HFN175P
PST180	1.080	18	1,46	2"	706	1.064	1.046	155	HFN205Q	HFN205P
PST220	1.320	22	1,68	2 ½"	806	1.316	1.166	230	HFN300Q	HFN300P
PST260	1.560	26	2,19	2 ½"	806	1.316	1.166	240	HFN300Q	HFN300P
PST300	1.800	30	2,41	2 ½"	806	1.316	1.166	245	HFN370Q	HFN370P
PST350	2.100	35	3,06	2 ½"	806	1.316	1.166	250	HFN370Q	HFN370P
PST460	2.760	46	3,14	DN100	1.007	1.690	1.097	470	HFS610Q	HFS610P
PST520	3.120	52	3,54	DN100	1.007	1.723	1.097	490	HFS610Q	HFS610P
PST630	3.780	63	4,64	DN100	1.007	1.722	1.657	580	HFS750Q	HFS750P
PST750	4.500	75	5,73	DN150	1.007	1.722	1.657	670	HFS1000Q	HFS1000P
PST900	5.400	90	7,63	DN150	1.007	1.722	1.657	690	HFS1000Q	HFS1000P
PST1200	7.200	120	8,92	DN150	1.007	2.048	1.657	830	HFS1510Q	HFS1510P
PST1500	9.000	150	12,35	DN200	1.007	2.208	2.257	1.100	HFS1510Q	HFS1510P
PST1800	10.800	180	15,96	DN200	1.007	2.208	2.257	1.190	HFS2000Q	HFS2000P

Performances refer to air-cooled models with air suction of FAD 20°C/1 bar A, and the following operating conditions: air suction 25°C/60% RH, 7 barg working pressure, pressure dew point in accordance with class 5 of DIN ISO 8573-1, 25°C cooling air temperature, 35°C compressed air inlet temperature. All indicated data refers to DIN ISO 7183. All models supplied with refrigerant R407C and for operation up to 14 barg. 50Hz models PST075-095 supplied with 230V/1ph/50Hz power supply, models PST120-1800 with 400V/3ph/50Hz. Water-cooled versions available from model 220. PST075-350 models with BSPP-F connections. The 60Hz version of the PoleStar Smart® models are available from 7m<sup>3</sup>/min air flow.

## Air flow correction factors for differing working conditions

A) Working pressure correction factors	barg	3	4	5	6	7	8	9	10	11	12	13	14
		<b>0,74</b>	<b>0,83</b>	<b>0,9</b>	<b>0,96</b>	<b>1</b>	<b>1,04</b>	<b>1,07</b>	<b>1,08</b>	<b>1,11</b>	<b>1,12</b>	<b>1,14</b>	<b>1,15</b>
B) Air inlet temperature correction factors	°C	30	35	40	45	50	55	60	65				
		<b>1,23</b>	<b>1</b>	<b>0,84</b>	<b>0,7</b>	<b>0,59</b>	<b>0,5</b>	<b>0,45</b>	<b>0,4</b>				
C) Ambient temperature correction factors	°C	20	25	30	35	40	45	50					
		<b>1,06</b>	<b>1</b>	<b>0,95</b>	<b>0,9</b>	<b>0,83</b>	<b>0,77</b>	<b>0,72</b>					

To obtain the actual air flow multiply the nominal air flow by the above correction factors (ie. Air flow x A x B x C). PoleStar Smart® can operate up to an ambient temperature of 50°C and inlet temperature of 65°C. The above correction factors are approximate: for a precise selection always refer to the software selection program or contact your Parker Hiross partner.

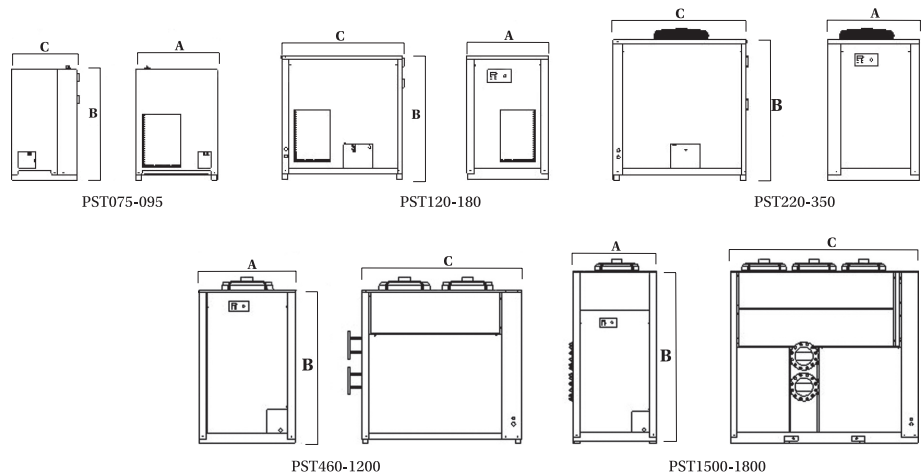

# Parker Worldwide

**AE – UAE, Dubai**  
Tel: +971 4 8127100  
parker.me@parker.com

**AR – Argentina, Buenos Aires**  
Tel: +54 3327 44 4129

**AT – Austria, Wiener Neustadt**  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe, Wiener Neustadt**  
Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AU – Australia, Castle Hill**  
Tel: +61 (0)2-9634 7777

**AZ – Azerbaijan, Baku**  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium, Nivelles**  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BR – Brazil, Cachoeirinha RS**  
Tel: +55 51 3470 9144

**BY – Belarus, Minsk**  
Tel: +375 17 209 9399  
parker.belarus@parker.com

**CA – Canada, Milton, Ontario**  
Tel: +1 905 693 3000

**CH – Switzerland, Etoy**  
Tel: +41 (0) 21 821 02 30  
parker.switzerland@parker.com

**CL – Chile, Santiago**  
Tel: +56 2 623 1216

**CN – China, Shanghai**  
Tel: +86 21 5031 2525

**CZ – Czech Republic, Klecany**  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany, Kaarst**  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark, Ballerup**  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain, Madrid**  
Tel: +34 902 33 00 01  
parker.spain@parker.com

**FI – Finland, Vantaa**  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France, Contamine s/Arve**  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece, Athens**  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HK – Hong Kong**  
Tel: +852 2428 8008

**HU – Hungary, Budapest**  
Tel: +36 1 220 4155  
parker.hungary@parker.com

**IE – Ireland, Dublin**  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IN – India, Mumbai**  
Tel: +91 22 6513 7081-85

**IT – Italy, Corsico (MI)**  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**JP – Japan, Tokyo**  
Tel: +(81) 3 6408 3901

**KR – South Korea, Seoul**  
Tel: +82 2 559 0400

**KZ – Kazakhstan, Almaty**  
Tel: +7 7272 505 800  
parker.easteurope@parker.com

**LV – Latvia, Riga**  
Tel: +371 6 745 2601  
parker.latvia@parker.com

**MX – Mexico, Apodaca**  
Tel: +52 81 8156 6000

**MY – Malaysia, Shah Alam**  
Tel: +60 3 7849 0800

**NL – The Netherlands, Oldenzaal**  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway, Ski**  
Tel: +47 64 91 10 00  
parker.norway@parker.com

**NZ – New Zealand, Mt Wellington**  
Tel: +64 9 574 1744

**PL – Poland, Warsaw**  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal, Leca da Palmeira**  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania, Bucharest**  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia, Moscow**  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden, Spånga**  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SG – Singapore**  
Tel: +65 6887 6300

**SK – Slovakia, Banská Bystrica**  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia, Novo Mesto**  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TH – Thailand, Bangkok**  
Tel: +662 717 8140

**TR – Turkey, Istanbul**  
Tel: +90 216 4997081  
parker.turkey@parker.com

**TW – Taiwan, Taipei**  
Tel: +886 2 2298 8987

**UA – Ukraine, Kiev**  
Tel +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom, Warwick**  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**US – USA, Cleveland**  
Tel: +1 216 896 3000

**VE – Venezuela, Caracas**  
Tel: +58 212 238 5422

**ZA – South Africa, Kempton Park**  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

European Product Information Centre  
Free phone: 00 800 27 27 5374  
(from AT, BE, CH, CZ, DE, DK, ES, FI, FR, IE,  
IT, NL, NO, PL, PT, RU, SE, UK, ZA)

BULPST-00-EN